


Multiboost Rectangular: 500ltr

The Multiboost Rectangular range is designed for houses and apartments where there is low mains water pressure and where pressure fluctuates. It is electronically controlled through a flow switch unit which starts and stops the pump automatically when the tap is opened and closed. The rectangular range is designed for areas where height restrictions are an issue.

Key Features

- Non-corrosive holding tank (WRAS approved material)
- Minimal installation requirement
- Adjustable LED digital display flow controller
- Dry run protection with auto restart (time delay)
- Start-up pressure 2.5 bar (adjustable)

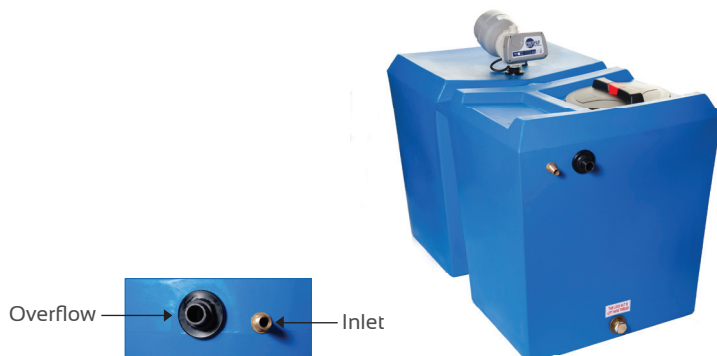


Range Options

Product Code	Model
1017490	500ltr Utility Fixed Speed

System Connections

Connection	Size
Inlet*	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

*Bypass unit recommended to be fitted on inlet supply

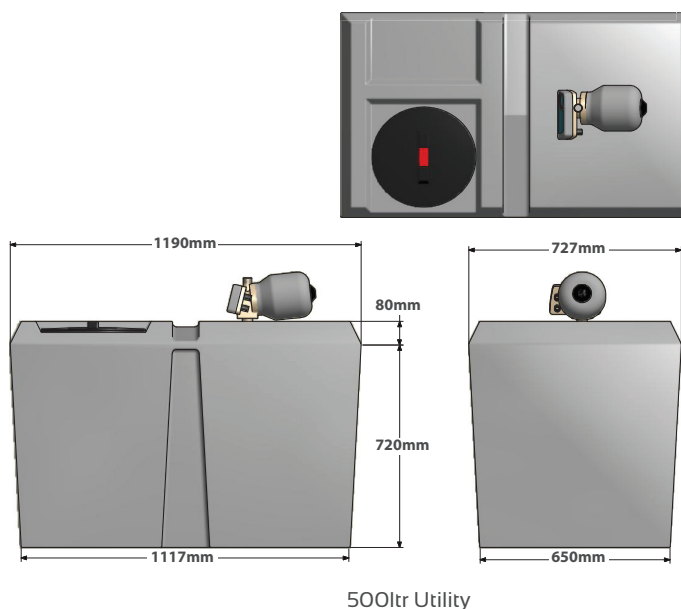

	Fixed Speed Option
Power supply	240 volt, 50Hz
Pump	Pedrollo TOP Multi 2 (240 volt)
Controller	Presflo Multi with integral 3 litre pressure vessel
Current Input	3.4 amp
Mains Power Cable	5mtr x 1.5mm ² 3 core
Pump dB Rating (approx.)	<65dB
Tank Weight Empty	34kg
Tank Weight Full	1ltr of water = 1 kg plus weight of empty tank
Access Cover Ø	285mm

Pump Type	Power		Q l/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Top Multi 2	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5