

Multiboost Utility: 650ltr & 1000ltr

The Multiboost Utility range is designed for commercial use on a larger scale where there is low mains water pressure and where pressure fluctuates. It is electronically controlled through a flow switch unit which starts and stops the pump automatically when a tap is opened and closed. The Utility range is designed for areas where the floor space is not restricted. This range caters for a wider variation of tank options to suit various applications.

Key Features

- Non-corrosive holding tank (WRAS approved material)
- Minimal installation requirement
- Adjustable LED digital display flow controller
- Dry run protection with auto restart (time delay)
- Start-up pressure 2.5 bar (adjustable)




Range Options

Product Code	Model
1028679	650ltr Utility Fixed Speed
1001925	1000ltr Utility Fixed Speed
1012153	1000ltr Utility Variable Speed

System Connections

Connection	Size
Inlet*	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

*Bypass unit recommended to be fitted on inlet supply

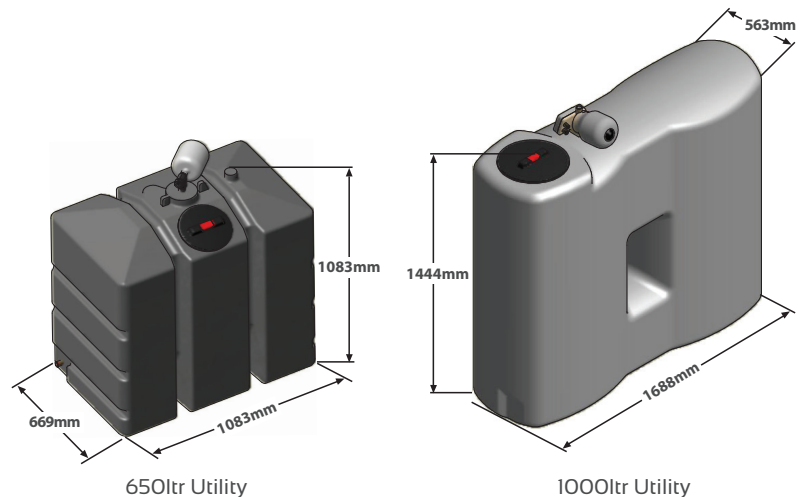

	Fixed Speed Option	Variable Speed Option
Power supply	240 volt, 50Hz	240 volt, 50Hz
Pump	Pedrollo TOP Multi 2 (240 volt)	Pedrollo Nkm 2/4 GE-N (240 volt)
Controller	Presflo Multi with integral 3 litre pressure vessel	Steadypress M/M 8.5amp (D01141091)
Current Input	3.4 amp	6 amp
Mains Power Cable	5mtr x 1.5mm ² 3 core	5mtr x 1.5mm ² 3 core
Pump dB Rating (approx.)	<65dB	<65dB
Tank Weight Empty	63kg	70kg
Tank Weight Full	1ltr of water = 1 kg plus weight of empty tank	1ltr of water = 1 kg plus weight of empty tank
Access Cover Ø	285mm	285mm

Pump Type	Power		Q l/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Top Multi 2	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5
Nkm 2/4 GE-N	0.75	1	H Metres	63	61	59	57	54	50	45	39	31