


TOP MULTI 2 TEST REPORT

EN ISO 9906 Grade 3B (2015)

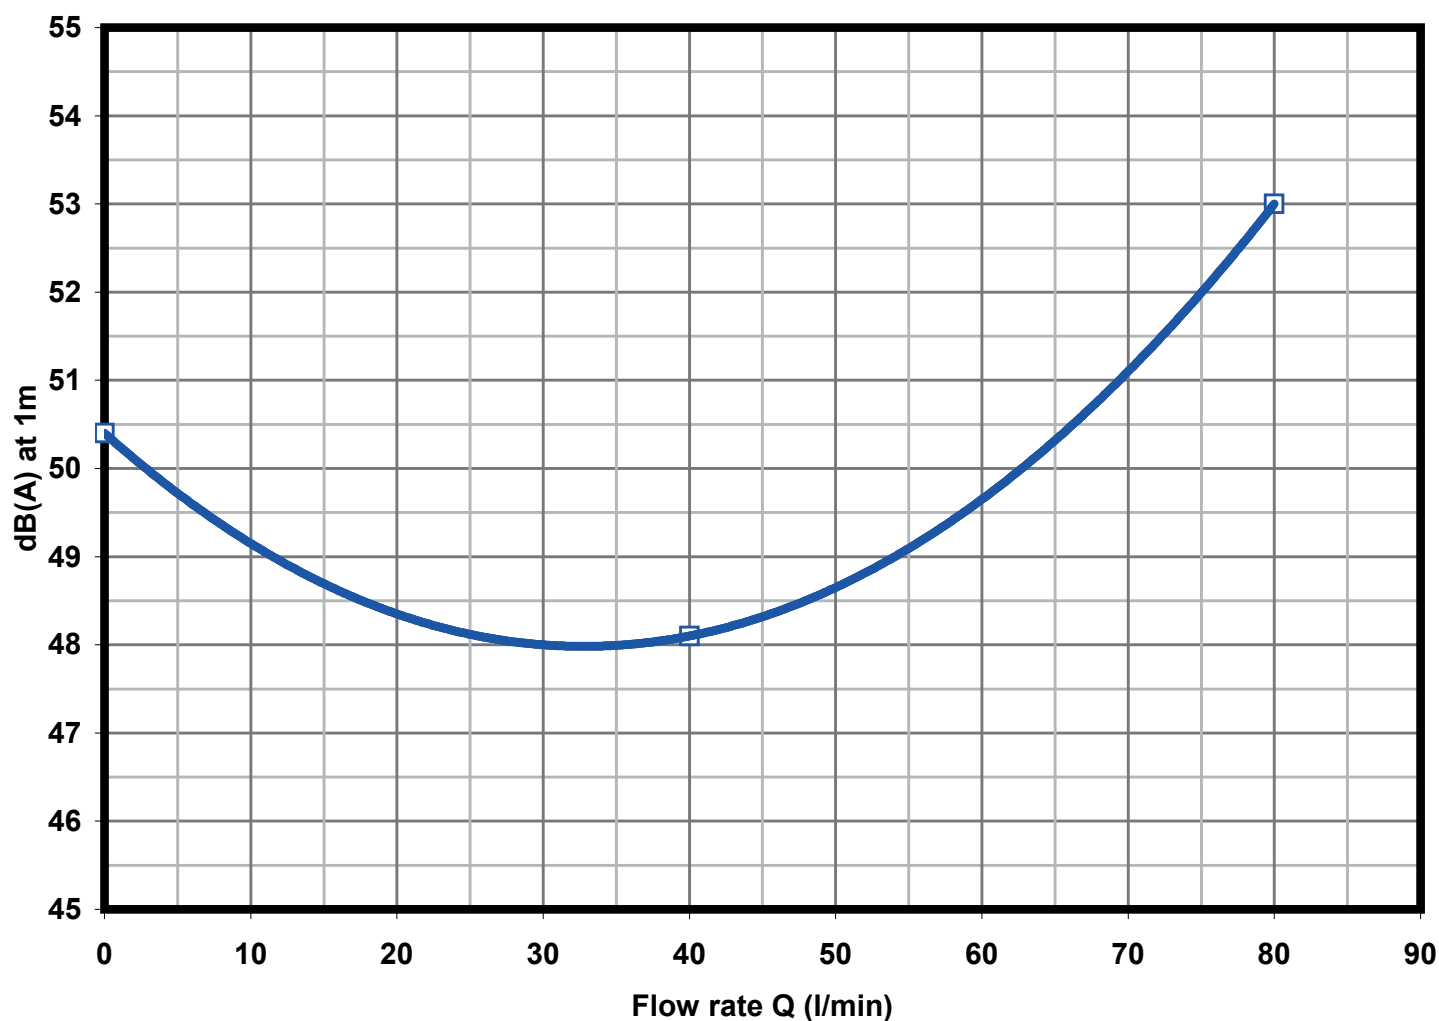

The declared performances are valid for liquids with density 1,0 kg/dm³ and kinematic viscosity 1mm²/s

Please note, when a pump is submerged in liquid, you are no longer dealing with decibel levels, but vibration levels, so the positioning of your Multiboost is vitally important.

The subsequent vibration levels will vary depending on the amount of space surrounding the unit and the type of material it is placed on. The use of insulation jackets will help to reduce vibration noise.

