


Multiboost Rectangular: 270ltr

The Multiboost Rectangular range is designed for houses and apartments where there is low mains water pressure and where pressure fluctuates. The Multiboost Rectangular 270ltr tank is designed for areas where height restrictions and access are an issue.

The Top Multi 2 Auto is a submersible pump equipped with electronic features for starting and stopping the pump as the tap is turned on and off. In the event of pump running dry it automatically tries to resume normal service at intervals of increasing time (15, 30, 60 minutes / max 24 hours). After approximately 30 minutes of repeated stopping and starting at intervals of less than 2 minutes from each other the device will stop the pump. After a rest period of 30 minutes the pump will automatically resume normal activity.


Key Features

- Non-corrosive holding tank (WRAS approved material)
- Protective lid enclosure as standard
- Minimal installation requirement
- An internal electronic device starts or stops the pump automatically when the tap is open or closed
- After long periods of pump inactivity the electronic device starts the pump every 48 hours for 10 seconds
- Dry run protection with auto restart (time delay)
- Start-up pressure 1.5 bar

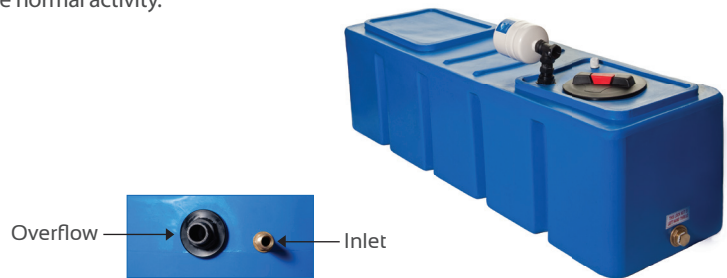


Range Options

Product Code	Model
1021452	270ltr Utility Fixed Speed Auto Tech

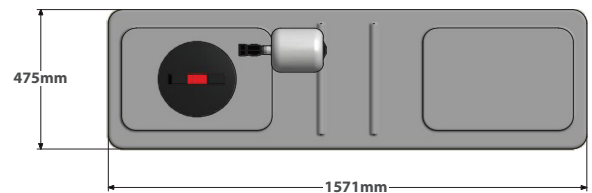

System Connections

Connection	Size
Inlet*	½" BSP
Outlet	1" BSP
Overflow	1" BSP
Drain Off	1" BSP

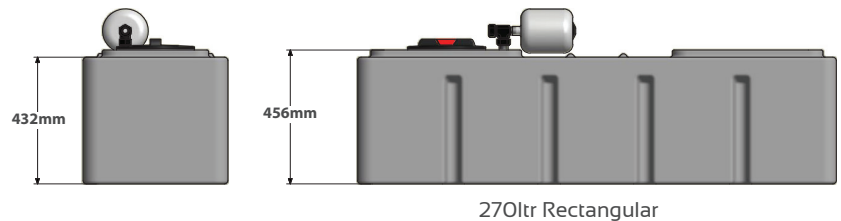

*Bypass unit recommended to be fitted on inlet supply

	Fixed Speed Option
Power supply	240 volt, 50Hz
Pump	Pedrollo TOP Multi 2 - Tech (240 volt)
Controller	Presflo Multi with integral 3 litre pressure vessel
Current Input	3.4 amp
Mains Power Cable	5mtr x 1.5mm ² 3 core
Pump dB Rating (approx.)	<65dB
Tank Weight Empty	29kg
Tank Weight Full	1ltr of water = 1 kg plus weight of empty tank
Access Cover Ø	190mm

Pump Type	Power		Q l/min	0	10	20	30	40	50	60	70	80
	kW	HP										
Top Multi 2 - Tech	0.55	0.75	H Metres	42	40	38	34	30	24	18	11.5	5